


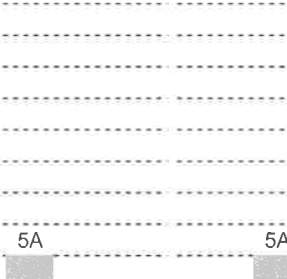
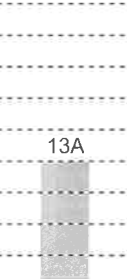
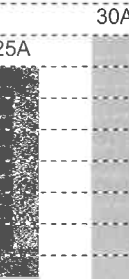
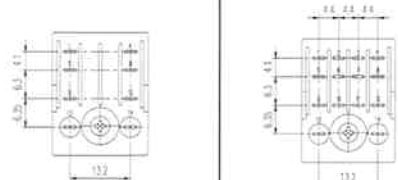













	RE		RP	RPT
Appearance	2 Poles	4 Poles	1 2 3 Poles	1 2 3 Poles
				
Outline (L x W x H) mm	27.8 x 21,5 x 36,0		38,0 x 35,0 x 51	38,0 x 35,0 x 51
Weight	32g	35g	72.6g	85g
Features	<ul style="list-style-type: none">● Conforms to foreign safety standard.● 2 and 4 transfer contact with high power capacity.● PC Board terminal and solder lug terminal are available for customer's various selections.● Standard and Flanged casing.		<ul style="list-style-type: none">● 1 to 3 Poles with switching current up to 13A● PCB terminal and 2 types of solder lug Terminal for customer's various selection	<ul style="list-style-type: none">● 1 to 3 Poles● Switching current up to 25A● Solder Lug terminal with Flanged case are available.
Contact Specification				
Contact Form	DPDT	4PDT	SPDT/DPDT/3PDT	SPDT/DPDT/3PDT
Maximum Allowable Contact Current (A)				
Contact Capacity (Resistive Load)	5A/250VAC 5A/30VDC	5A/250VAC 5A/30VDC	10A/240VAC 13A/120VAC 13A/28VDC	2P 25A/240VAC 13A/28VDC 3P 20A/120VAC 13A/28VDC
Reference Minimum Switching Load	10mA, DC 10V		5mA, DC 5V	10mA, DC 5V
Coil Specification				
Nominal Coil Voltage (V)	DC	6,12,24,48,110,120,220/240		6,12,24,48,115,125
	AC	6,12,24,48,110,120,		6,12,24,48,120,220,240
Coil Power Consumption	DC Coil : 0.9W AC COIL : 1.0-1.3VA (60Hz)		DC Coil : 1.5W AC : 2-3VA	DC Coil :1.5W AC 1 :2-3VA
Dielectric Strength				
Between Coil & Contact (50/60 Hz for 1 minute)	AC 1, 500V		AC 1,500V	AC 1,500V
Between Contact (50/60 Hz for 1 minute)	AC 1,000V		AC 500V	AC 500V
Life Expectancy (Operations)				
Electrical	1 x 10 ⁵		1 x 10 ⁵	1 x 10 ⁵
Mechanical	1 x 10 ⁷		1 x 10 ⁷	1 x 10 ⁷
Safety Standard Certificate	C-UL		RPT : C-UL	
Bottom View				
Mounting Method				
Page	117~120		121~122	123~124

Note: Meaning of symbol marks  : PC board terminal and Plug-in ;  :Plug-in ;  : Plug-in

<i>RK</i>	
2 Poles	3 Poles
	
34.5 x 34.5 x 52.5	34.5 x 34.5 x 52.5
72.6g	81.2g
<ul style="list-style-type: none"> ● Easy to mount, wire use. ● Withstanding voltage : 2000V 	
DPDT	3PDT
10A	10A
10A/240VAC	10A/240VAC
10mA, DC 10V	
6,12,24,48,110,120	
6,12,24,48,110,120,220	
DC Coil : 1.5W AC Coil : 1.9 to 2.8VA	
AC 1,000V	
AC 1,000V	
1 x 10 ⁵	
1 x 10 ⁷	
C-UL	
	
	
125~127	